

Trimmer RS164

Manufacturer	Gämmerler GmbH
Type	RS164
Serial number/year of manufacture	2018

Performance

Power	80 (optional 100) m/min
Pagination ¹	8 - 128
Format untrimmed A x B	min. 122 x 122 mm max. 530 x 530 mm
Format trimmed A x B	
2-edge trim A x B	min. 120 x 120 mm max. 526 x 526 mm
1-edge trim A x B	min. 115 mm
Trim width ^{2 3}	min. 2 mm - max. 65 mm
Shingle thickness	max. 25 mm
Trimming system	shingle or single trim
Type of printed products	gravur and offset-printing (heatset and non-heatset)

Main drive

Three-phase gear motor	1,5 kW - 1500U/min.
------------------------	---------------------

Knife drive

Three-phase brake motor	3,0 kW – 3000U/min.
-------------------------	---------------------

The sound pressure level does not exceed 80 dB (A) corresponding to EN 13 023.

Physical

Outer dimensions (Lenght x Width x Height)	1703 x 1442 x 1253 mm
Weight	1.200 kg
Knife diameter	250 mm
Segment blades	28 per knife

¹ depending on paperweight

² depending on paperweight

³ depending on pagination

Air consumption

Nominal pressure	6 bar
Consumption ⁴	40 NI/min (@ 1 bar)
Vacuum Speed ⁵	min. 35 m/s

Air pressure quality according to DIN ISO 8573-1 of quality class 3.

Electrical loads

Power	7,5 kW
Full load Amps.	25 A
Supply voltage ⁶	400, 3~, N, PE V
Frequency	50 Hz

Status

As new with warranty


Pictures



⁴ depending on copy and trim width

⁵ depending on copy and trim width

⁶ others optional

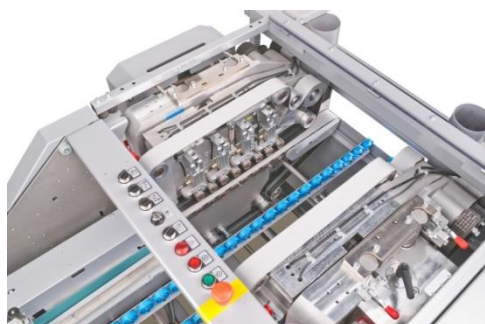

Price

On demand
